


6 Dec 2010 12:07:36

CH1 S11 LOG 5 dB/REF 0 dB
 CH2 S21 LOG 10 dB/REF 0 dB

5: .01600 dB
 5: -72.006 dB .250 000 000 GHz

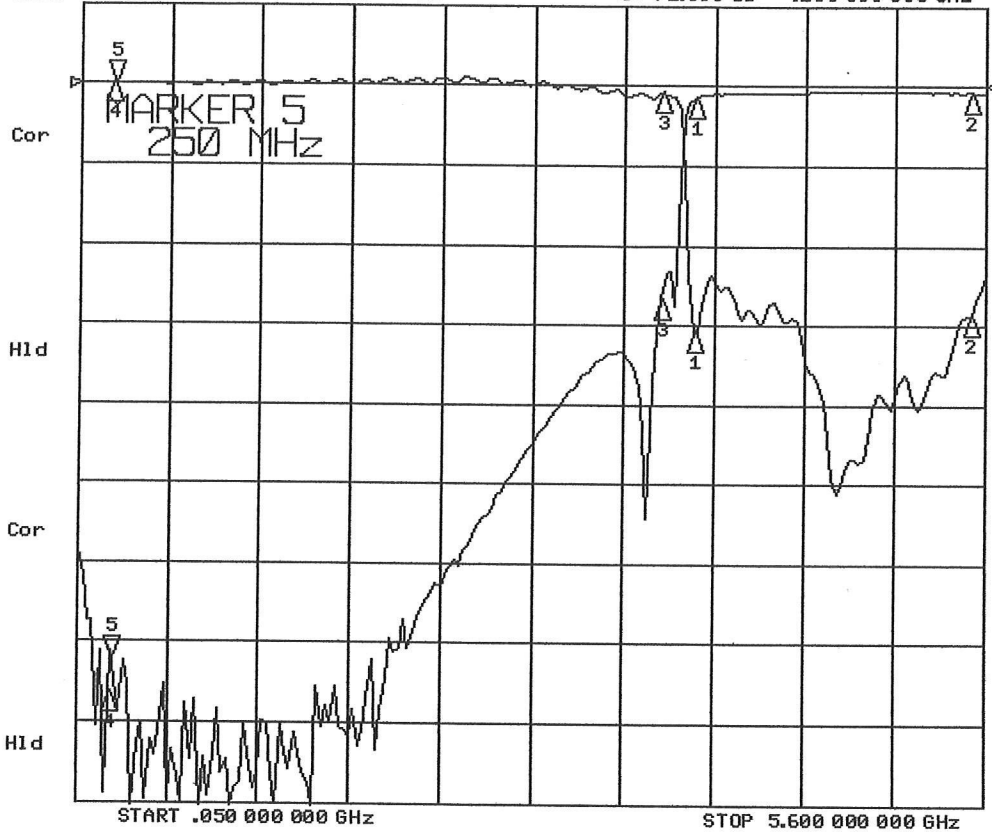

CH1 Markers

- 1: -15.514 dB
3.80000 GHz
- 2: -14.384 dB
5.50000 GHz
- 3: -44.000 dB
3.60000 GHz
- 4: .01900 dB
236.000 MHz

CH2 Markers

- 1: -1.4590 dB
3.80000 GHz
- 2: -70.700 dB
5.50000 GHz
- 3: -26.900 dB
3.60000 GHz
- 4: -76.449 dB
236.000 MHz



Bree Engineering 1K3H5
 P/N 800629

S/N _____
 BY: RC DATE: 10-6-10

P/N 800629

Parameter	Specification	Units	Limit	Reading
Cutoff Frequency	3800	Mhz	min	
Passband (3800 to 5000 Mhz)	2.0	dBa	max	<u>1.45</u>
Passband (3800 to 5000 Mhz)	1.0	dBc	max	<u>-.75</u>
Return Loss (3800 to 5000 Mhz)	10	dB	min	<u>>12</u>
Rejection				
10 to 2000 Mhz	30	dBa	min	<u>>35</u>
2000 to 3600 Mhz	20	dBa	min	<u>>25</u>