


20 Dec 2012 08:10:09

CH1 S22 LOG 5 dB/REF 0 dB 1:-18.843 dB 1 227.000 000 MHz
 CH2 S21 LOG 10 dB/REF 0 dB 1:-3.0526 dB

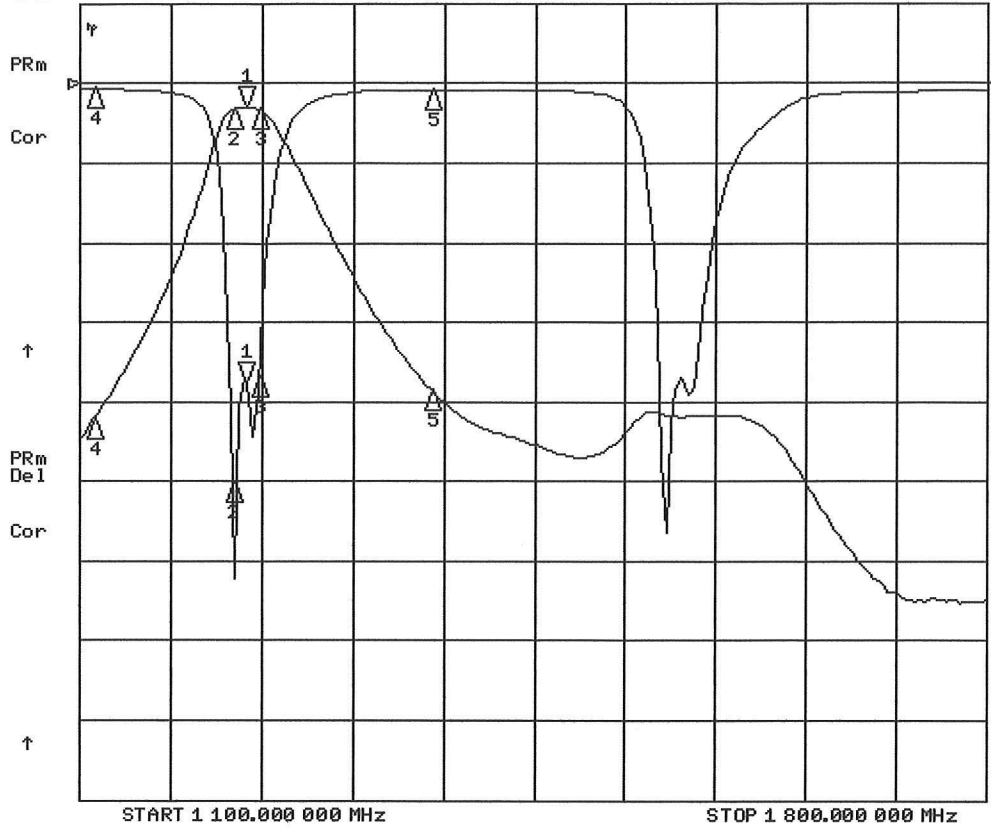

CH1 Markers

2:-25.099 dB
1.21700 GHz
3:-18.507 dB
1.23700 GHz
4:-32.060 dB
1.11000 GHz
5:-4.3070 dB
1.37000 GHz

CH2 Markers

2:-3.2725 dB
1.21700 GHz
3:-3.3058 dB
1.23700 GHz
4:-42.265 dB
1.11000 GHz
5:-38.526 dB
1.37000 GHz



Bree Engineering 1K3H5

P/N 802998 CH1

S/N 2791-1- 5

BY: pc DATE: 12-20-12

P/N 802998

CH 1 L2	Parameter	Specification	Units	Limit	Reading
	Center Frequency	1227	MHz	typ	
	Insertion Loss (1217 to 1237 MHz)	4.0	dBa	max	<u>3.0</u>
	Passband (1214 to 1237 MHz)	1.0	dBc	max	<u>.25</u>
	Return Loss(1217 to 1237 MHz)	14.0	dB	max	<u>>15</u>
	Rejection				
	1110 MHz	30	dBc	min	<u>39.2</u>
	1370 MHz	30	dBc	min	<u>35.4</u>